

650-M

Ağır İş Pnömatik Bağlantı Elemanı Mekanizması / Yatay Tabanlı / Yatay Pistonlu
Heavy Duty Pneumatic Clamp Mechanism / Horizontal Base / Horizontal Piston



Model No	BOY SIZE	F0 (kN)	F1 (kN)	F2 (kN)	H1	H2	H3	L1	O	α ($\pm 5^\circ$)	Ø-PISTON	HAVA BASINCI AIR PRESSURE	Va (dm ³)	AĞIRLIK WEIGHT (kg)
650-4-M	4	0,8	9	6	455	373	132	151	6,2	93	Ø40	6 bar	1,3	2,75
650-6-M	6	0,11	18	12	540	446	155	177	8,2	93	Ø50	6 bar	2,5	4,5
650-8-M	8	0,18	30	20	680	547	210	241	12,2	93	Ø63	6 bar	5,2	10,85

H1: Açık Yükseklik (Open Height), H2: Kapalı Yükseklik (Close Height), H3: Mekanizma Yüksekliği (Mechanism Height)

L1: Kapalı Uzunluk (Close Length)

Pistonlar çift etkili, manyetik ve ayarlanabilir yastıklamalıdır. (Pneumatic cylinders are double acting, magnetic and with adjustable cushioning)

Va: 6 bar basınçta hava tüketim miktarı (Air consumption @6bar)

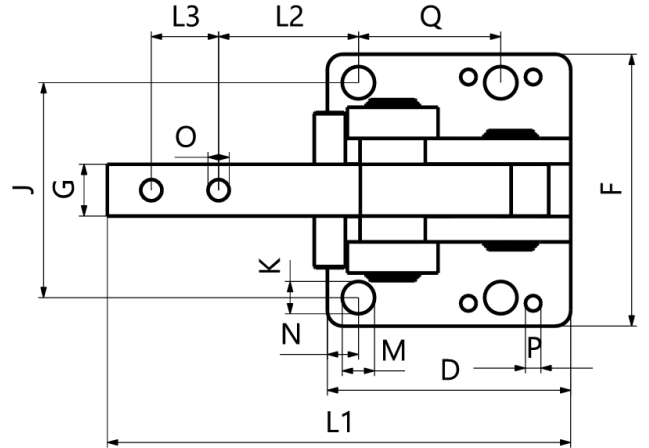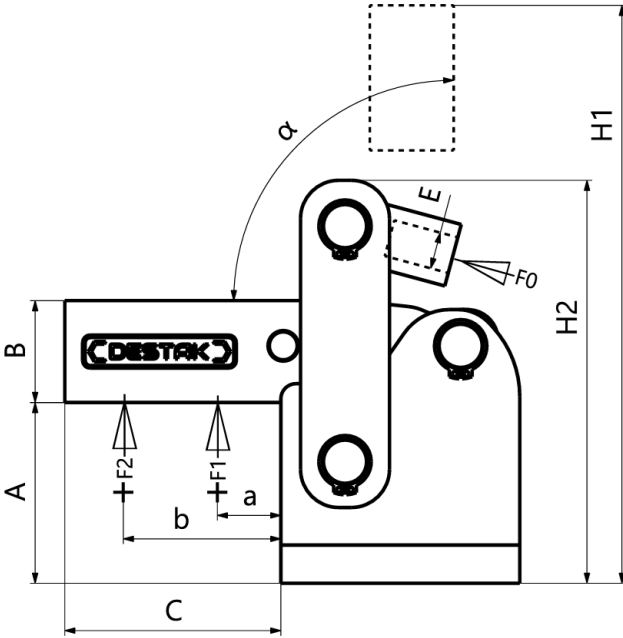

Model No	BOY SIZE	A	B	C	D	E	F	G	J	K	L2	L3	M	N	P	Q	a/b
650-4-M	4	66	32	75	76	M12X1,25	90	15	70	11,2	47	27	11	10	Ø6	52	20/65
650-6-M	6	71	40	85	92	M16X1,5	104	20	83	12,4	54	26	12,4	12	Ø6	55	20/70
650-8-M	8	95	60	117	124	M16X1,5	144	30	115	16,4	67	40	16,4	16	Ø6	80	20/93

Boyutlar ve teknik bilgiler önceden bildirilmeksizin değiştirilebilir. Dimensions and technical information are subject to alteration without notice.